
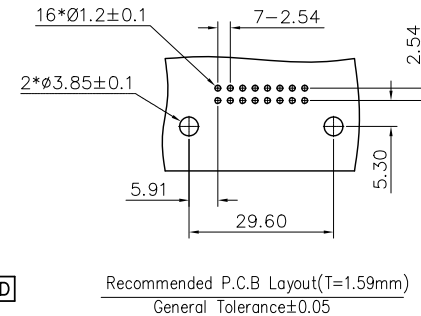
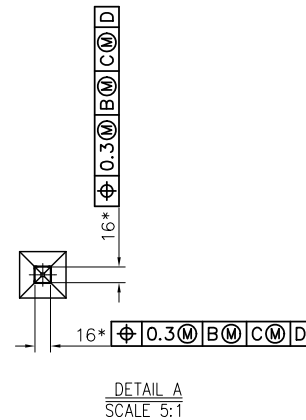
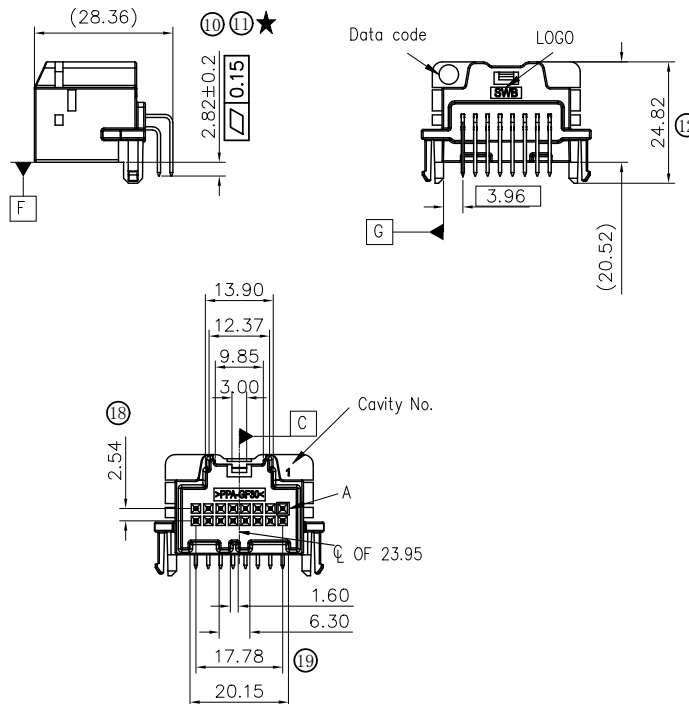


- Voltage rating: 18V . AC / DC
- Current rating: 5A .AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: $\geq 100M\Omega$
- Material(Pin): PIN-Brass Housing-PPA GF30
- Product Specification: PS-HRS-2552-1
- Packaging Drawing: HRS-2552WR-2x08P-PASN3ZT
- Symbols for SPC dimensions: "★"

HRS-2552 W R - 2*08 P - PA SN3 Z I
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-wafer
- ③ Connector Type: R-Right Angle 90°
- ④ Row No.-Pin No: 2*08-2x08Pin
- ⑤ Special encoding: P-Positioning Column
- ⑥ Plastic material: PA- PPA
- ⑦ Plating Code: SN3- Ni 40~120u"(1~3um)overall
Top plating: Sn 80~200u"(2~5um)overall
- ⑧ Color: Z-brown
- ⑨ Manner of packing: T-Blister tray

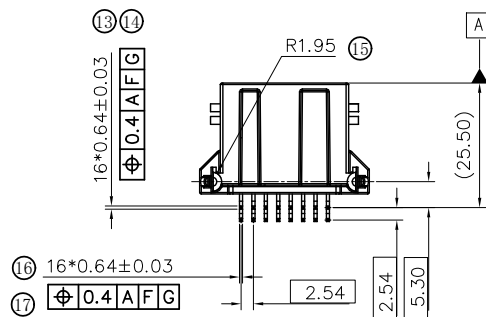

						GENERAL TOLERANCE	 Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-2552WR-2*08P-PASN3ZT					
						X ±0.35					APPROVALCHECKDRAWNDATE					UNIT
						.XX ±0.25	Jason HuangJinjiang yangXiaohu Jiang2020/12/08									mm
						.XXX ±0.15						PROJECT 				
						X.° ±2°										
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL											