

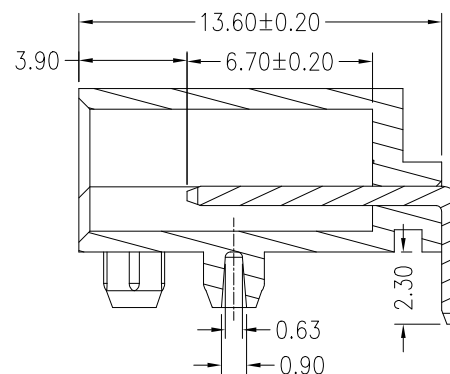
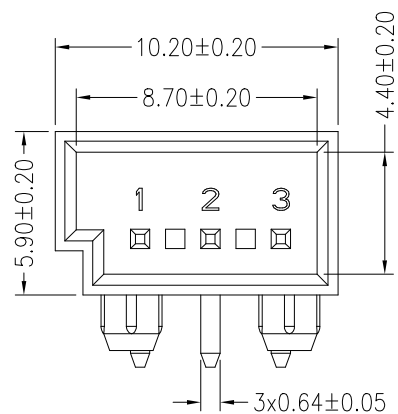



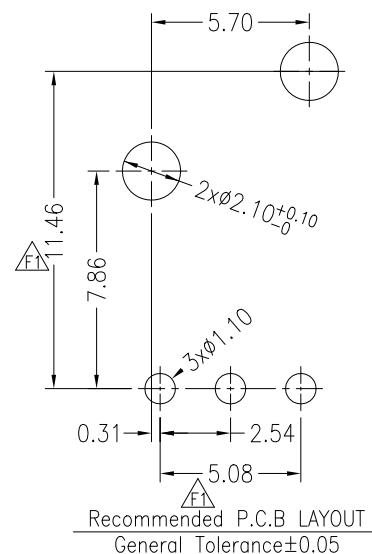

SECTION A-A
SCALE 1:1

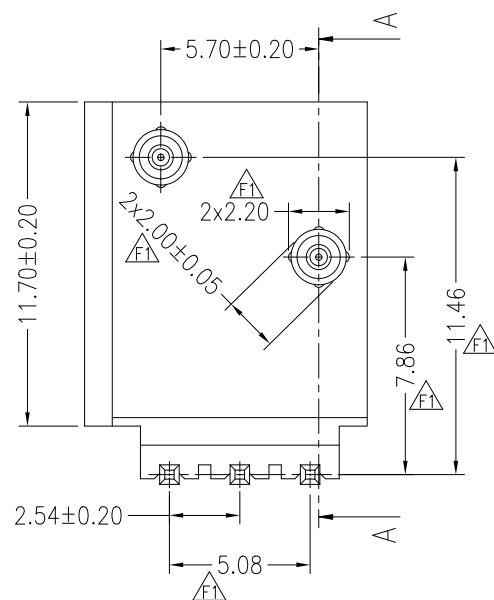

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 30\text{m}\Omega$
- Material(Pin): Brass
- Mates With HRS Housing:HRS-2530H

HRS-6621 W R X-03 X -PT SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category:W-WAFER
- ③ Welding Board Angle:R-Right Angle 90°
- ④ Welding Way:Blank-DIP
- ⑤ Row No.-Pin No.:03-03P
- ⑥ Special No.:
- ⑦ Material:PT-PBT 94V-0
- ⑧ Plating Category:SN-Bright Tin Plating
V01-All Gold Flash
- ⑨ Color:Blank-Black Color

2023/08/28	F1		Increase cylinder size,Modify the position of some annotations	Larry Lin	Jack Zhang	GENERAL TOLERANCE	 Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-6621WR-03-PTXX				
2023/05/22	F		Add P.C.B Layout diagram	Larry Lin	Jack Zhang	.X ±0.30					TITLE 2.54 mm Crimp Style Connectors				
2020/07/22	E		Update Drawing Frame	Xue	Robing	.XX ±0.20 .XXX ±0.10 X* ±2"									
DATE	REV	ECN NO	DESCRIPTION	MODIFY	APPROVAL	PROJECT 	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
							Jack Zhang	Larry Yang	Liu Yan	2007/05/03	mm	1:1	1/1	F1	CD