

RoHS

This products can apply to the HRS Doc NO. QA-3-04-005 of Environmental&Material Management Rules

■Notes:


- Mates With HRS HSG:2551H series
- Symbols for SPC dimensions: "★"
- Packaging Drawing: HRS-2551C-PTBK-X
- Meet test specification LV214&USCAR2
- Product Specification:PS- HRS-2551-01
- General tolerance according to ISO 20457:

Tolerance grade	1 to 3	>3 to 6	>6 to 10	>10 to 18	>18 to 30	>30 to 50
TG5	±0.08	±0.11	±0.14	±0.17	±0.20	±0.23

HRS - 2551 C - PT BK - X
① ② ③ ④ ⑤


- ① Series No.:
② Connector Type: C
③ Plastic material: PT-PBT UL94V-0
④ Color: BK-Black
⑤ Special No.: X-A: A type lever; B: B type lever

A type lever




HRS-2551C-PTBK-A


B type lever



HRS-2551C-PTBK-B

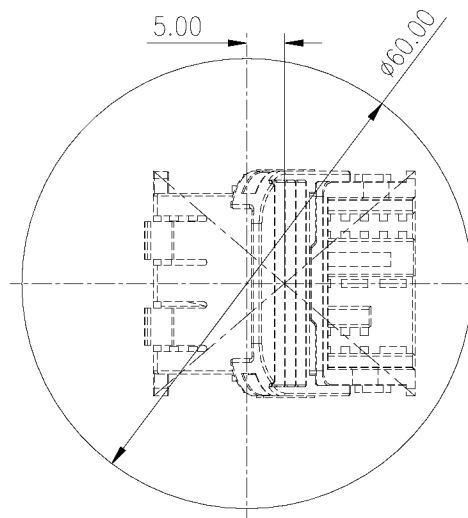

Recommended cut-out diameter dimension

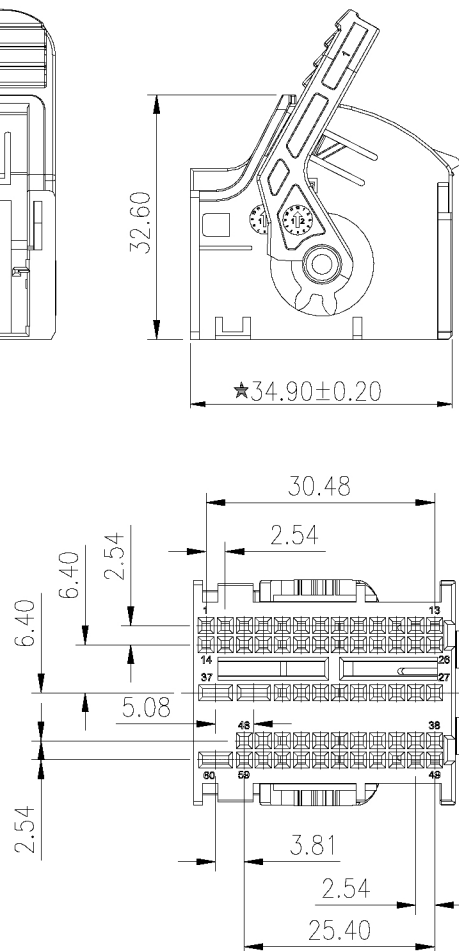

20231207	A0	/	Initial release	Bless Guo	Larry Yang
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL

GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX±0.15
X: ±2°
PROJECT





Horus Int. Electronics. Co., LTD.
Horustech Electronics. Co., LTD.

APPROVAL	CHECK	DRAWN	DATE
Jack Zhang	Larry Yang	Bless Guo	2022/10/25

PART NO. HRS-2551C-PTBK-X				
TITLE Cover 60P ASSY				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	CD




RoHS

This products can apply to the HRS Doc NO. QA-3-04-005 of Environmental&Material Management Rules

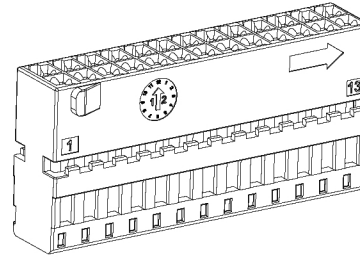

HRS-2551 H - 2*13 - PT GY
① ② ③ ④ ⑤

- ① Series No.:
② Connector Type: H-Housing
③ Row No.-Pin No: 2*13-Double Rows 2*13Pin
④ Plastic material: PT-PBT UL94V-0
⑤ Color: GY-Gray

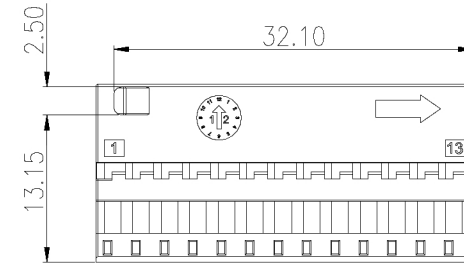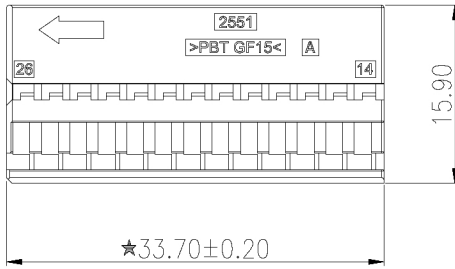

Notes:

- Mates With HRS CAP: HRS-2551C-PTBK-X
- Mates With HRS terminals: HRS-0631TXF-HY2B
- Symbols for SPC dimensions: "★"
- Packaging Drawing: HRS-2551H-2*13-PTBK
- Meet test specification LV214&USCAR2
- Product Specification: PS-HRS-2551-01
- General tolerance according to ISO 20457:

Tolerance grade	1 to 3	>3 to 6	>6 to 10	>10 to 18	>18 to 30	>30 to 50
TG5	±0.08	±0.11	±0.14	±0.17	±0.20	±0.23

GENERAL TOLERANCE						PART NO.			
.X ±0.35						HRS-2551H-2*13-PTGY			
.XX ±0.25						TITLE			
.XXX ±0.15						MQS socket housing 26P			
X: ±2"						UNIT			
PROJECT						SCALE			
APPROVAL						SHEET			
CHECK						REV			
DRAWN						NUMBER			
DATE						mm			
Jack Zhang						1:1			
Larry Yang						1/1			
Bless Guo						A0			
2022/10/25						CD			






RoHS

This products can apply to the HRS Doc NO. QA-3-04-005 of Environmental&Material Management Rules

Notes:

- Mates With HRS CAP: HRS-2551C-PTBK-X
- Mates With HRS terminals:HRS-0631TXF-HY2B andHRS-2803TXF-HY2B
- Symbols for SPC dimensions:"★"
- Packaging Drawing:HRS-2551H-34-PTBK
- Meet test specification LV214&USCAR2
- Product Specification:PS-HRS-2551-01
- General tolerance according to ISO 20457:

Tolerance grade	1 to 3	>3 to 6	>6 to 10	>10 to 18	>18 to 30	>30 to 50
TG5	±0.08	±0.11	±0.14	±0.17	±0.20	±0.23

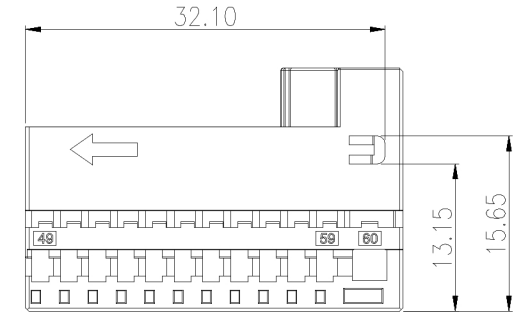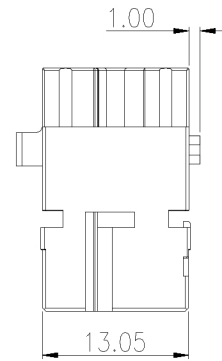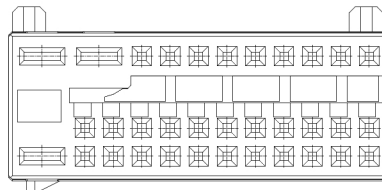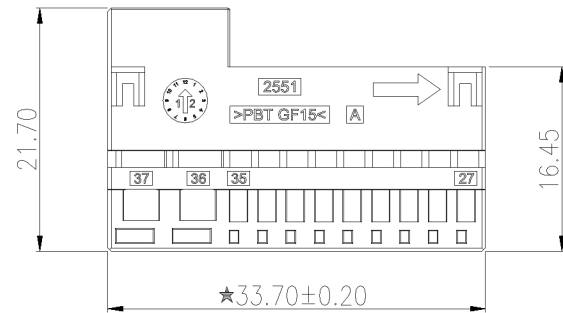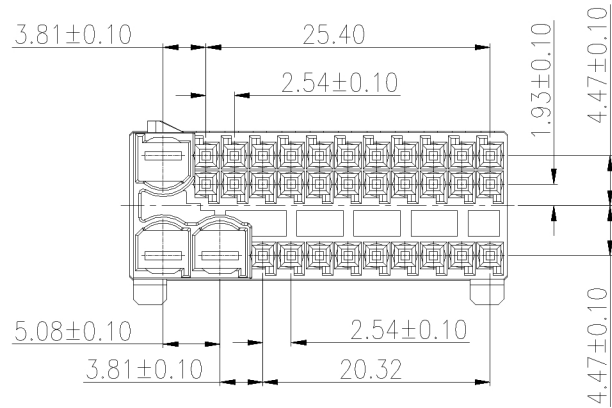

HRS-2551 H - 34 - PT BK
① ② ③ ④ ⑤

- ① Series No.:
- ② Connector Type: H-Housing
- ③ Row No.-Pin No: 34-Three Rows 34Pin
- ④ Plastic material: PT-PBT UL94V-0
- ⑤ Color: BK-Black

					GENERAL TOLERANCE				PART NO.			
					.X ±0.35				HRS-2551H-34-PTBK			
					.XX ±0.25				TITLE			
					.XXX±0.15				MQS socket housing 34P			
					X: ±2"				UNIT			
					PROJECT				SCALE			
					APPROVAL				SHEET			
					CHECK				REV			
					DRAWN				NUMBER			
					DATE							
					Jack Zhang				mm			
					Larry Yang				1:1			
					Bless Guo				1/1			
					2022/10/25				A0			
									CD			