



RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

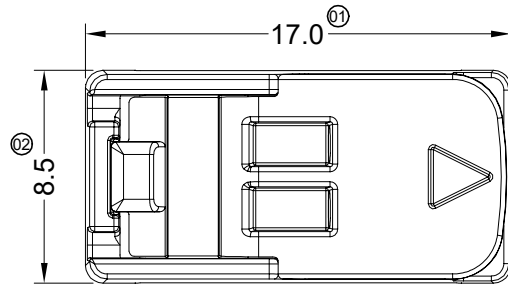

Specifications :



- Voltage rating: 100V AC / DC
- Current rating: 2.0A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 500M\Omega$
- Terminal resistance: $\leq 4m\Omega$

Material:

- Housing&Cover : ABS+PC, UL94V-0 HF
Colour ;White(RAL 9010)
- Terminal: Phosphor bronze
Plating : 100u" Sn Over 50u" Ni
- Contact Retention : 15 N Min

HRS-2600 W V X - 02 HF - AP SN1 WH T
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V- Straight 180°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: 02-02P
- ⑥ Plug the Pin & Special No.: HF-Halogen Free
- ⑦ Material: AP-ABS+PC UL94V-0
- ⑧ Planting Category: SN1-Tin plating
- ⑨ Color: WH-White
- ⑩ Packing Form: T-Tray

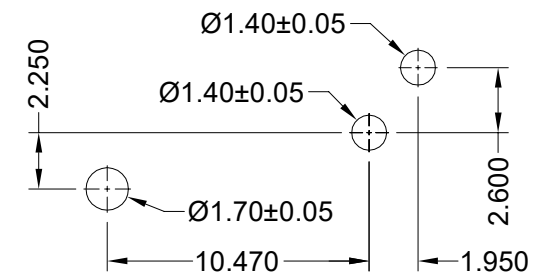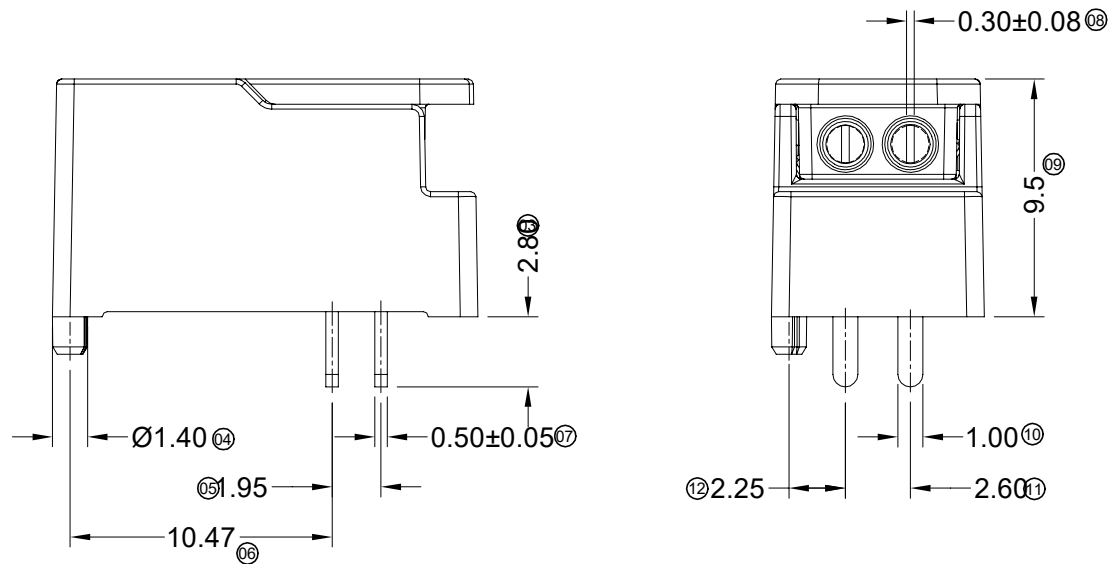

P.C.B LAYOUT

						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-2600WV-02HF-APSN1WHT				
						.X ±0.30					TITLE 2.60 mm Crimp Style Connector				
						.XX ±0.20									
2020/08/04	B		Update Drawing Frame	Xue	Robing	.XXX ±0.10	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO	DESCRIPTION	MODIFY	APPROVAL	X° ±2°							Jason	2017/06/12	mm
1		2		3		4		5		6		7		8	