

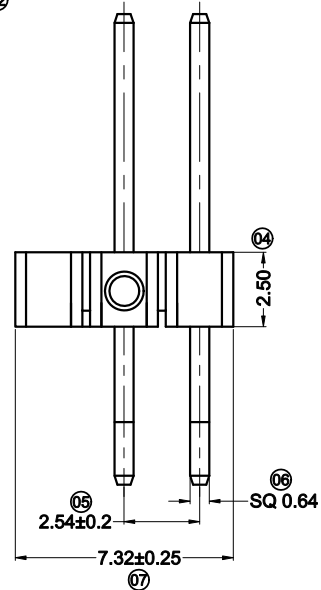


RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

RD-1

Removed 1PIN



Recommended P.C.B Layout
General Tolerance±0.05

■ Specifications :

- Current rating: 3 AMP
- Contact resistance:20 MΩ MAX
- Insulation resistance: 1000 MΩ MIN
- Withstanding voltage: 500V AC/minute
- Temperature range: -40℃~+105℃
- Material(Pin):Brass

HRS-6501 W R S- 03N01 P - 9T V01 B -04

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: W-Wafer
③ Connector Type: R- Right Angle 90°
④ Mounting Type: S-SMT
⑤ Row No.-Pin No.: 03-3PIN N01-Removed 1 PIN
⑥ Special No.:P-With Post
⑦ Material: 9T-PA9T+30%GF UL94V-0
⑧ Plating Category:
V01-0.8u"Min gold plating over all
30u" Min nickel underplating over all
⑨ Color: B-Black Color
⑩ 04-8.0/2.5/5.3

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X° ±2°

PROJECT



Horus Int. Electronics. Co., LTD.
Horustech Electronics. Co., LTD.

PART NO.

HRS-6501WRS-03N01P-9TV01B-04

TITLE

2.54mm Crimp Style Connector

UNIT	SCALE	SHEET	REV	NUMBER
mm	4:1	1/1	A	A-013

DATE

REV

ECN NO

DESCRIPTION

MODIFY

APPROVAL

APPROVAL

Jason

CHECK

John Yang

DRAWN

Jiang

DATE

2020/09/12