

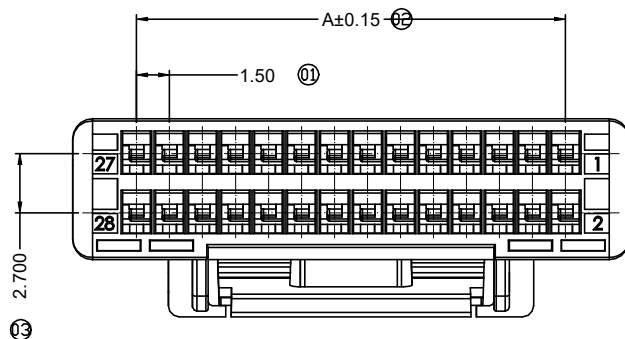
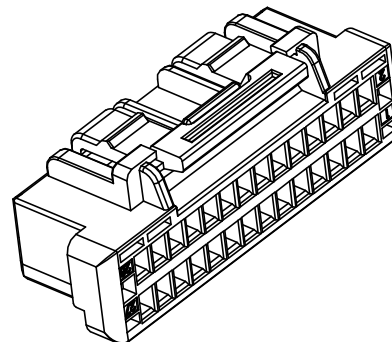



2*04P~2*05P Shape
Scale 1:0.7

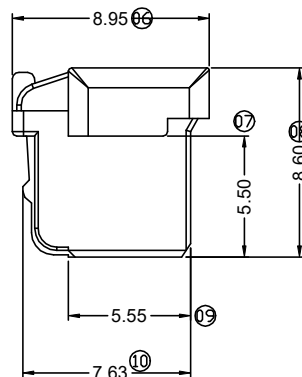



■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1.5A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Suitable HRS Terminal: HRS-1515T

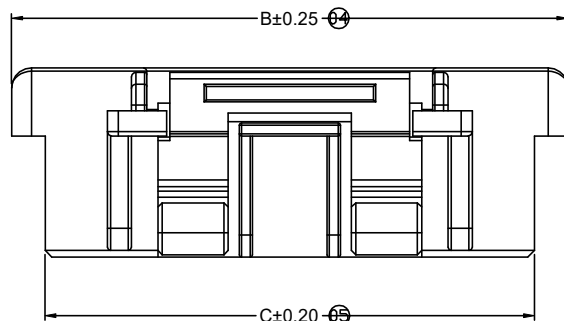


HRS-1515 H X -2*XX X -PT XX
 01 02 03 04 05 06 07

- ⑪ Series No.
 ⑫ Category: H-HSG
 ⑬ Appearance type: Blank-Ordinary
 ⑭ Row No.-Pin No.: 2*XX-2*04~2*17P
 ⑮ Plug the Pin & Special No.:
 Blank-There is no LOGO
 A-Have a LOGO
 ⑯ Material : PT-PBT 94V-0
 ⑰ Color: Blank-Natural Color

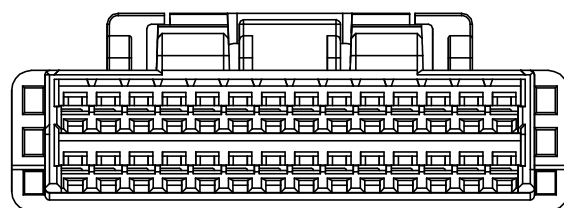

2*06~2*09P视图
比例 1:1

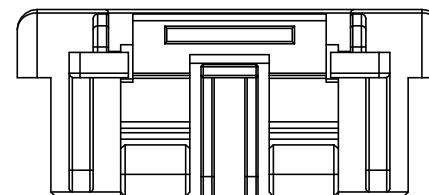


2*10~2*17P视图
比例 1:1

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*04	4.50	10.30	7.25	2*11	15.00	20.80	17.75
2*05	6.00	11.80	8.75	2*12	16.50	22.30	19.25
2*06	7.50	13.30	10.25	2*13	18.00	23.80	20.75
2*07	9.00	14.80	11.75	2*14	19.50	25.30	22.25
2*08	10.50	16.30	13.25	2*15	21.00	26.80	23.75
2*09	12.00	17.80	14.75	2*16	22.50	28.30	25.25
2*10	13.50	19.30	16.25	2*17	21.00	29.80	26.75

						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. HorusTech Electronics. Co., LTD.				PART NO. HRS-1515H-2*XX-PT								
						.X ±0.30					APPROVAL CHECK DRAWN DATE				TITLE 1.50mm Crimp Style Connectors				
						.XX ±0.20													
						.XXX ±0.10													
2022.05.11	A1	ER20220511001	Modify the rated current parameters	XUEXIAOLONG		X.* ±2"													
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 													

RoHS


This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

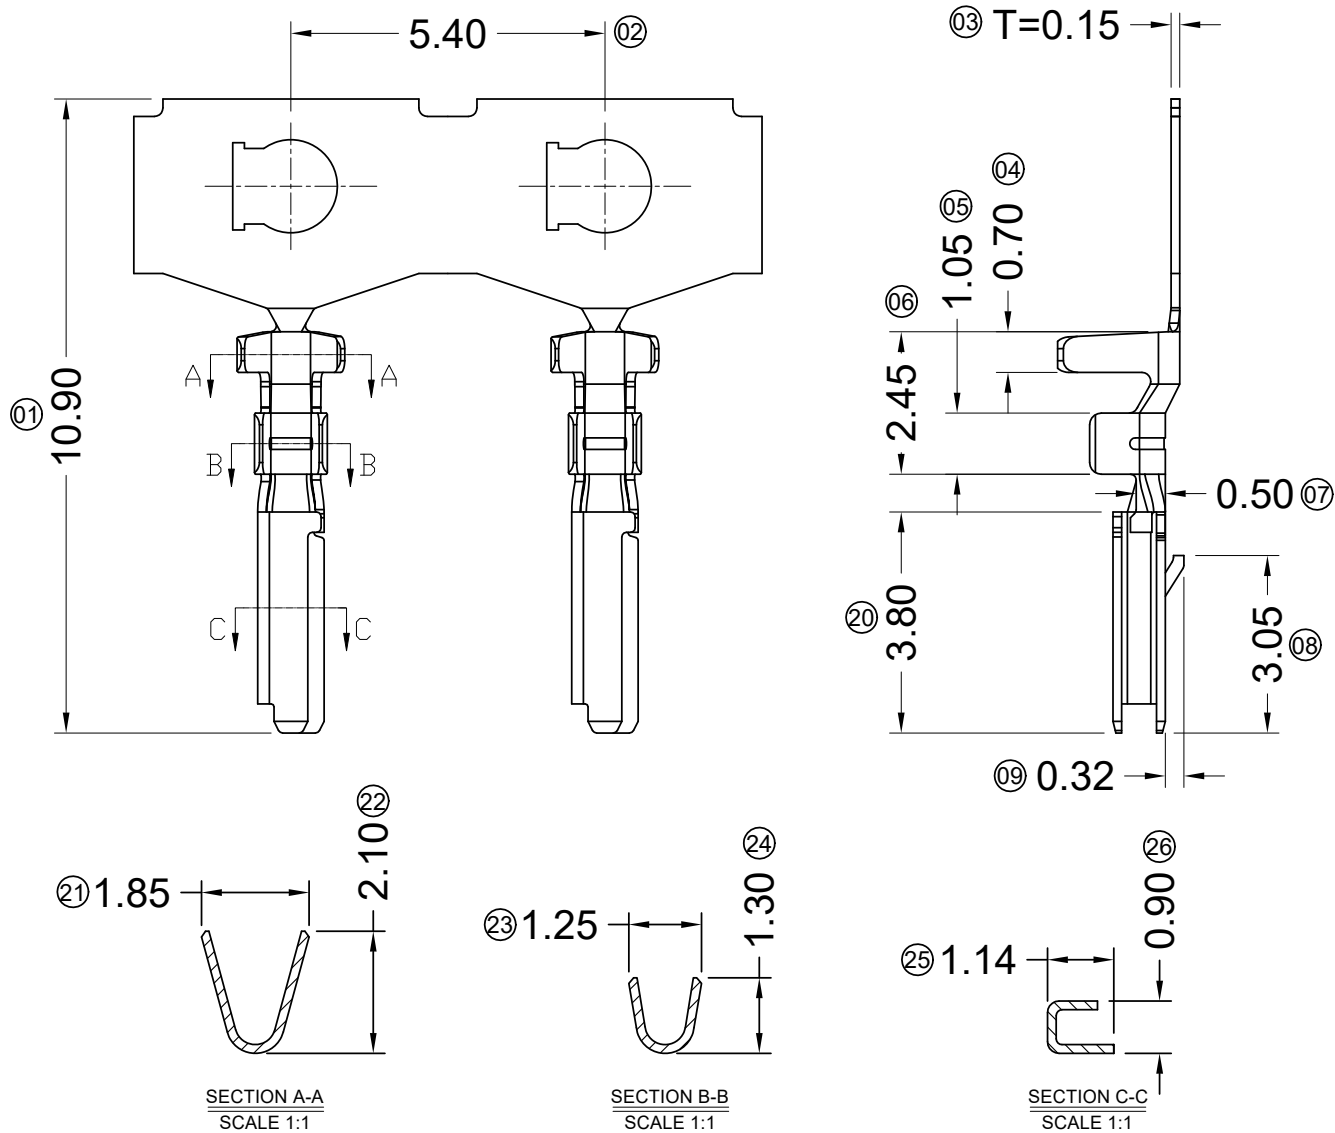**Specifications :**





- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 500\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 40\text{m}\Omega$
- Material(Pin): Phosphor bronze
- Mates With HRS Housing: HRS-1515H

HRS-1515 T X - P SN X - X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
- ② Category: T-terminal
- ③ Shape: Blank-ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating code: SN-Bright tin plating
- ⑥ Plating method:
Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No.

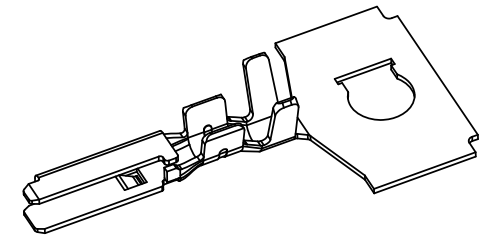

GENERAL TOLERANCE						PART NO.			
.X ± 0.30						HRS-1515T-PSN			
.XX ± 0.20						TITLE 1.50mm Crimp Style Connectors			
.XXX ± 0.10						UNIT			
X.° $\pm 2^\circ$						SCALE			
PROJECT						SHEET			
APPROVAL						REV			
Roving						NUMBER			
YYting						mm			
Wuxiaotao						1:1			
2018/06/05						1/1			
A-014						D			

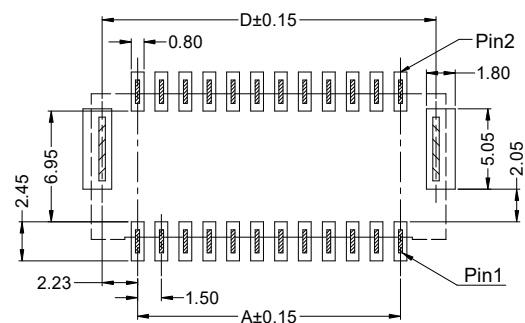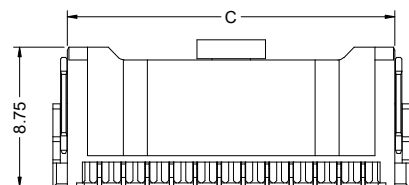

RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

- Voltage rating: 100V AC / DC
- Current rating: 1.5 AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

HRS-1515 W V S - 2*XX X- LP SW XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V- Straight 180°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: 2*XX-2*04P~2*14P
- ⑥ Plug the Pin & Special No.:
- ⑦ Material: LP -LCP 94V-0 ;
- ⑧ Planting Category:
SW-Ni50u" min,matte TIN 100u"min
- ⑨ Color: Blank-Natural Color

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2*04	4.50	10.30	8.50	8.95	2*11	15.00	20.80	19.00	19.45
2*05	6.00	11.80	10.00	10.45	2*12	16.50	22.30	20.50	20.95
2*06	7.50	13.30	11.50	11.95	2*13	18.00	23.80	22.00	22.45
2*07	9.00	14.80	13.00	13.45	2*14	19.50	25.30	23.50	23.95
2*08	10.50	16.30	14.50	14.95					
2*09	12.00	17.80	16.00	16.45					
2*10	13.50	19.30	17.50	17.95					


						GENERAL TOLERANCE	 Horus Int. Electronics. Co., LTD. HorusTech Electronics. Co., LTD.				PART NO. HRS-1515WVS-2*XX-LPSW				
						.X ±0.30					TITLE 1.50mm Crimp Style Connectors				
						.XX ±0.20									
						.XXX ±0.10									
2022/05/11	A2	ER20220511001	Modify the rated current parameters	XUEXIAOLONG		X.* ±2"	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 			XUEXIAOLONG	2021/12/20	mm	1:1	1/2	A2	A-006

RoHS


This products can apply to the HRS Doc NO. QA-3-04-005 of Environmental&Material Management Rules






2*04P~2*05P Shape
Scale 1:1



2*06P~2*09P Shape
Scale 1:1

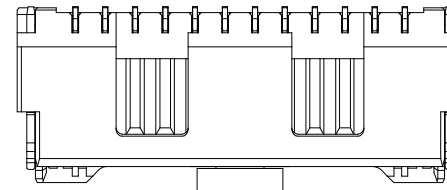




2*10P~2*14P Shape
Scale 1:1

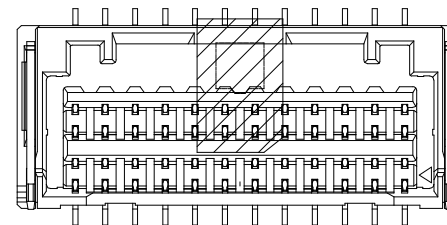

						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-1515WVS-2*XX-LPSW				
						.X ±0.30					TITLE 1.50mm Crimp Style Connectors				
						.XX ±0.20									
						.XXX ±0.10									
2022/05/11	A2	ER20220511001	Modify the rated current parameters	Xuexiaolong		X." ±2°	APPROVAL	CHECK	DRAWN	DATE					
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 			XUEXIAOLONG	2021/12/20	UNIT	SCALE	SHEET	REV	NUMBER
											mm	1:1	2/2	A2	A-000

RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

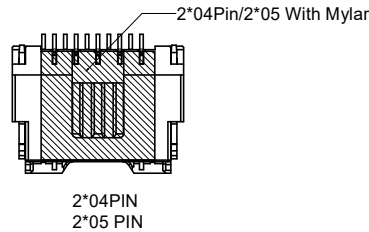






Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1.5A AC/DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 500\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 40\text{m}\Omega$

HRS-1515 W R S - 2*XX X- LP SW XX X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: R- Straight 90°
④ Welding Way: S-SMT
⑤ Row No.-Pin No.: 2*XX-2*04P~20*17P
⑥ Plug the Pin & Special No.:
⑦ Material: LP -LCP 94V-0 ;
⑧ Planting Category:
SW-Ni50u" min,matte TIN 100u"min
⑨ Color: Blank-Natural Color
⑩ W-Reel ,With Mylar

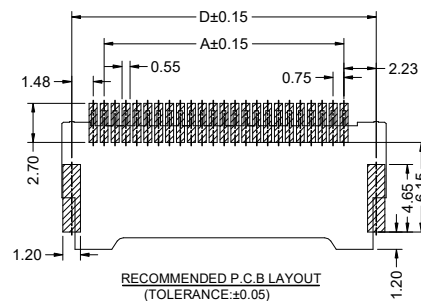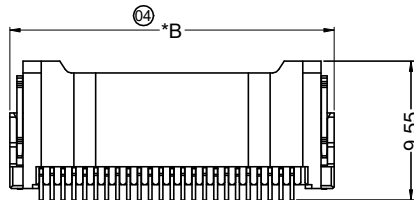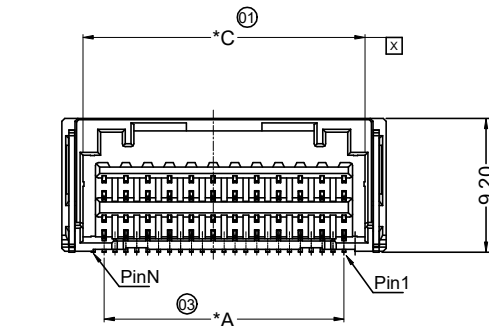


HRS-1515WRS-2*XX-LPSW	LCP UL 94V-0	Phosphor Bronze	Brass	Matte Tin-Plated	HRS-1515H-2*XX
PART NO	Material	Material(Pin)	Material (Solder Tabs)	Finish (Pin And Solder Tabs)	Mates With HRS Housing

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
04	4.50	10.30	7.40	8.95	11	15.00	20.80	17.90	19.45
05	6.00	11.80	8.90	10.45	12	16.50	22.30	19.40	20.95
06	7.50	13.30	10.40	11.95	13	18.00	23.80	20.90	22.45
07	9.00	14.80	11.90	13.45	14	19.50	25.30	22.40	23.95
08	10.50	16.30	13.40	14.95					
09	12.00	17.80	14.90	16.45					
10	13.50	19.30	16.40	17.95					


						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-1515WRS-2*XX-LPSWW				
						.X ±0.30					TITLE 1.50mm Crimp Style Connectors				
						.XX ±0.20									
						.XXX ±0.10	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
2022/05/11	A2	ER20220511001	Modify the rated current parameters	XUEXIAOLONG		X.° ±2°					mm	1:1	1/2	A2	A-000
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 			XUEXIAOLONG	2021/12/20					

RoHS


This products can apply to the HRS Doc NO. QA-3-04-005 of Environmental&Material Management Rules






2*04P~2*05P Shape
Scale 1:1



2*06P~2*09P Shape
Scale 1:1

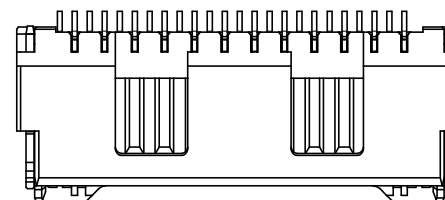

2*10P~2*14P Shape
Scale 1:1

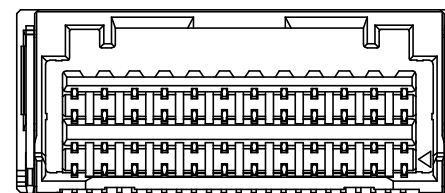

						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. Horus Int. Electronics. Co., LTD.				PART NO. HRS-1515WRS-2*XX-LPSWW				
						.X ±0.30					TITLE 1.50mm Crimp Style Connectors				
						.XX ±0.20	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
						.XXX ±0.10					mm	1:1	2/2	A2	A-000
2022/05/11	A2	ER20220511001	Modify the rated current parameters	Xuexiaolong		X." ±2"			XUEXIAOLONG	2021/12/20					
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 									