

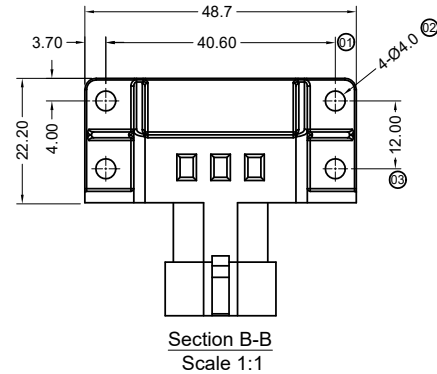
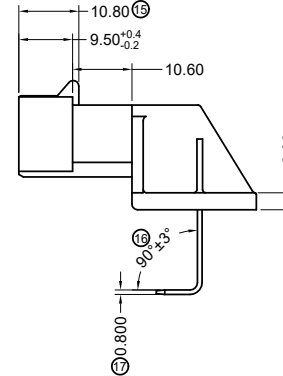
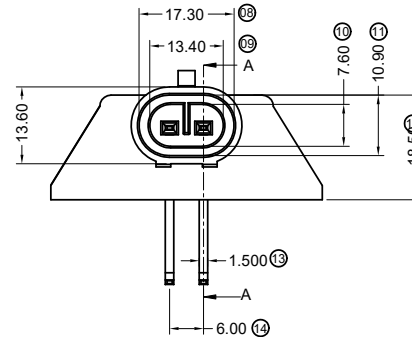


RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules


**Specifications :**

- Voltage rating: 24V AC / DC
- Current rating: 10A AC / DC
- Withstanding voltage: 1,500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 500\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$
- Material(Pin): Brass
- Finish(Pin): Matte Tin Plating

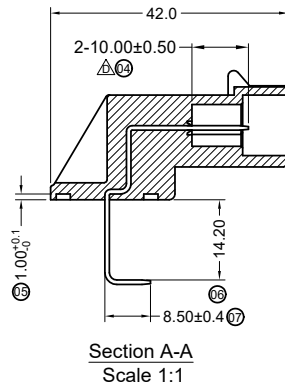

HRS-6003 H F -02 -N0 XX



- ① Series No
② Category: H-HSG
③ Welding Board Angle:
F-Female housing
④ Row No.-Pin No.: 02-02P
⑤ Material: N0-PA66 94V-0
⑥ Color : None-Black Color

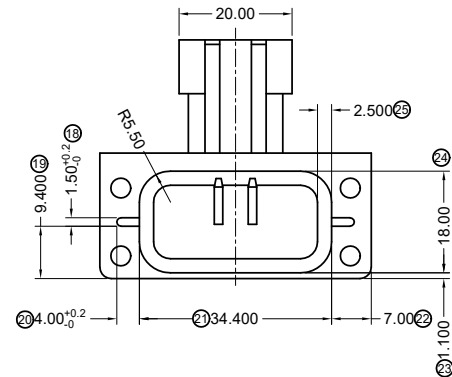




2020/03/31	E	EN20200331001	Update Drawing Frame, The Same ECR And ECN NO	Zeng	Robing	GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X° ±2° PROJECT	Horus Int. Electronics. Co., LTD. Forustech Horustech Electronics. Co., LTD.				PART NO. HRS-6003HF-02-N0				
2017-11-13	D	EN20171113001	Modify the size in kind	Yu wei	Jacky						TITLE 6.00mm Pump Superseal Ass Connector				
2016-09-05	C		According to the physical changes size	Joshua	Joshua		APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO	DESCRIPTION	MODIFY	APPROVAL		Smak	Joshua	LZX	2016/06/22	mm	1:1	1/1	E	A-000

RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

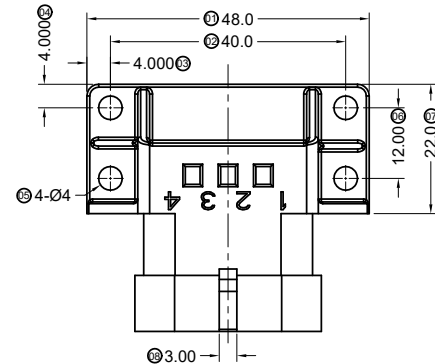
**Specifications :**

- Voltage rating: 24V AC / DC
- Current rating: 10A AC / DC
- Withstanding voltage: 1,500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 500\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$
- Material(Pin): Brass
- Finish(Pin): Matte Tin Plating

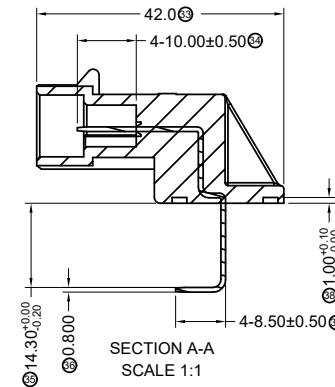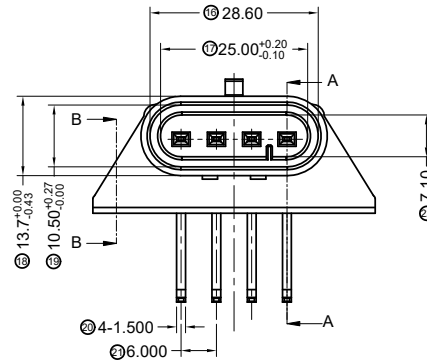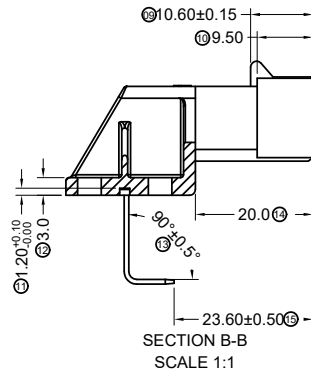

HRS-6003 H F-04 XX-N0 HF BK T
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No
② Category: H-HSG
③ Welding Board Angle:
F-Female housing
④ Row No.-Pin No.: 04-04P
⑤ Plug the Pin & special No.:
⑥ Material: N0-PA66 94V-0
⑦ HF-Halogen free
⑧ Color : BK-Black
⑨ Packing Form: T- Tray

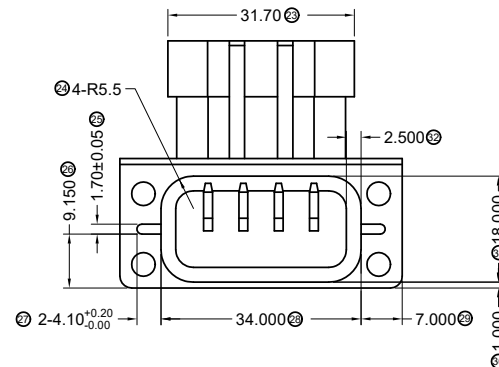

						GENERAL TOLERANCE		 Horus Int. Electronics. Co., LTD. Horus tech Electronics. Co., LTD.				PART NO.				
						.X	±0.30					HRS-6003HF-04-N0HFBKT				
						.XX	±0.20	APPROVAL				TITLE				
						.XXX	±0.10					6.00mm PUMP SUPERSEAL ASS Connector				
						X°	±2°					UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO	DESCRIPTION	MODIFY	APPROVAL	PROJECT		Smrk	Joshua	Yu wei	2017/08/25	mm	1:1	1/1	B	A-000